DS-1280ZJ-DM18



FEATURES:


- Aluminum alloy material with surface spray treatment
- Waterproof design



| DS-1280ZJ-DM18 | _ |
|---------------------------|---|
| | |
| Power intake box | |
| Hik White | |
| Suitable for dome cameras | |
| Aluminum Alloy | |
| Ø101 x 38mm | |
| 238g | |
| | Power intake box Hik White Suitable for dome cameras Aluminum Alloy Ø101 x 38mm |

INFORMATION:


- The bracket should be installed on a flat wall
- The wall must be capable of supporting over 3 times as much as the total weight of the camera and the mount
- The maximum load capacity of the bracket is 4.5kg
- Waterproof ribber is necessary for outdoor application

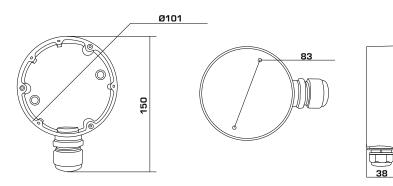


unit: mm

Installation View

1. Choose appropriate wall to install the bracket with and thread the cable



- 2. Separate basement and dome of camera
- 3. Fix the basement of camera to bracket and thread the cable



4. Adjust the angle of view, fix the lower case, and complete the installation

